




Aru 78 Classic IN

Inwards opening tilt and turn wooden window


- Made to Measure Sizes
- Good thermal performance (Window U_w 0,96 W/m²K of window 1230x1480 mm; glass U_g 0,72)
- Frame and sash profile thickness 78 mm
- Timber selection :
 - fingerjointed or selected laminated pine timber;
 - laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL colour chart, stain according to manufacturer's samples.
- Triple glazing
- Glazing with glazing beads inside, fastened with hidden nails, sealed with silicone in and out
- Glazing bar options:
 1. penetrating bars
 2. glued on both sides of the glass+slats inside the glazing (Norwegian style)
 3. glued on both sides of the glass (Georgian style)
 4. dekorative bars inside the glazing

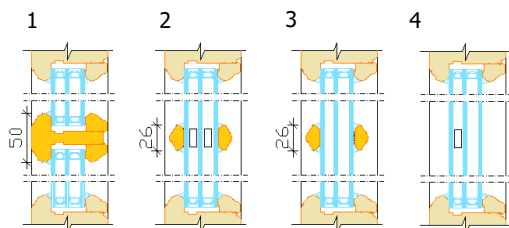


- Extras:
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern etc), various glass spacers
 - tilt first opening (open in the turn position after unlocking)
 - additional security elements of hardware
 - key lockable handles, design handles
 - fly net;
 - jamb extensions, window boards;
 - trickle vents
- Triangular windows

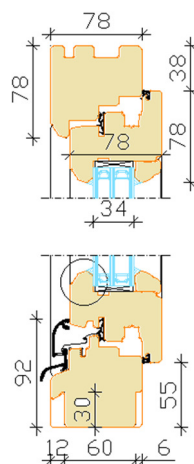


Openable window




The bottom frame is protected with aluminium profile




Section without mullion
Secondary sash/Primary sash



Fixed window



Section through fixed mullion
Opening sash/Opening sash




Section through mullion
Fixed light / Opening sash

OPENING Outside view



FIXED (direct glazing)



Tilt and turn (left/right)
Min max L= 410...1710 mm H= 410...2720 mm,
max weight of sash 130 kg




Turn only (left/right)
Min max L= 410...1710 mm H= 410...2720 mm,
max weight of sash 130 kg



Tilt only
Min max L= 435...2510 mm H= 380...1329 mm,
max weight of sash 80 kg

Handle positions:



Tilt position
(ventilation)



Turn position
for quick air exchange
or window washing



Closed