


AruAL 68 Cora IN

Inward Opening Tilt-and-Turn Wooden-aluminium Window

- Made to Measure Sizes
- Frame thickness 68 mm + aluminium cover
- Sash profile thickness 68 mm + aluminium cover
- Timber selection:
 - fingerjointed or selected laminated pine timber;
 - laminated oak timber
 - laminated meranti timber
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stane according to manufacturer's samples.
- Aluminium cladding - powder coated. Paint according to RAL color chart
- Double glazing
- Glazing with glazing beads inside, sealing from inside and outside with silicone
- Glazing bar options:
 1. penetrating glazing bars
 2. Vienna glazing bars (Norwegian style)
 3. glued-on decorative bars (Georgian style)
 4. decorative bars inside the glass unit

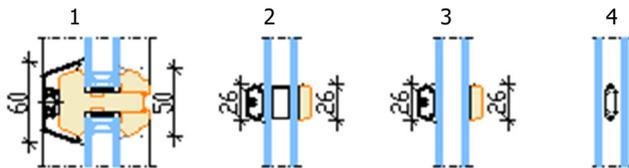


- Extras:
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern, etc.), different materials and different colors of edge mouldings;
 - tilt first opening (TF), safety fittings
 - lockable handles, design handles;
 - insect nets;
 - jamb extensions, window boards;
 - trickle vents
- Various combinations with opening and non-opening parts
- Special shape windows




OPENING: Inside view



FIXED (direct glazing)
Min sizes 330 x 330 mm





Tilt and turn (left/right)
Min max L= 420...1710 mm H= 420...2527 mm,
max weight of sash 130 kg




Turn only (left/right)
Min max L= 420...1710 mm H= 420...2527 mm,
max weight of sash 130 kg




Tilt only
Min max L= 440...2500 mm H= 420...1300 mm,
max weight of sash 80 kg

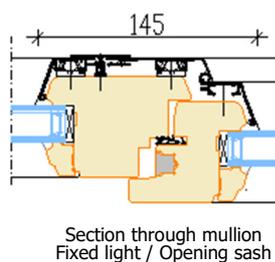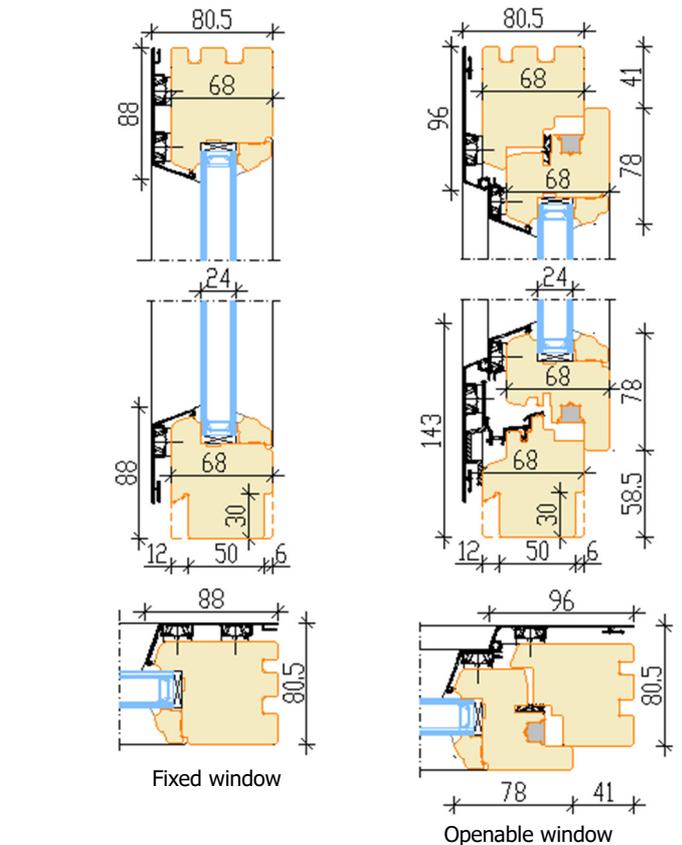

Section through mullion
Fixed light / Opening sash

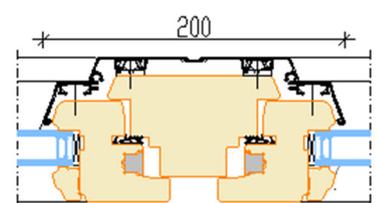


Section through fixed mullion
Opening sash/Opening sash

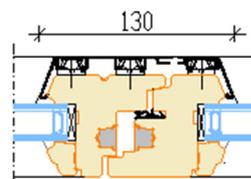

Section without mullion
Secondary sash/ Primary sash



Handle positions:

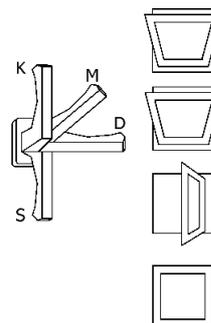

K - Tilt position (ventilation)

M - Microventilation

D - Turn position
for quick air exchange or
window washing

S - Closed