



AruAL patio FOLD 78 Cora IN


Inwards opening wood aluminium bifold terrace door

- Made to Measure Sizes
- Frame thickness 78 mm + aluminium cover (90,5 mm)
- Sash profile thickness 78 mm + aluminium cover (90,5 mm)
- Timber selection:
 - fingerjointed, oknotted or selected laminated pine timber;
 - laminated oak timber
- Standard timber threshold
- Timber finishing with water-based paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples.
- Aluminium cladding - powder coated. Paint according to RAL color chart
- Triple glazing, thickness 42 mm
- Glazing from the inside with wooden glazing bead, fastened with hidden nails and sealed with silicone
- Color range of fittings - silver, white and brown
- Glazing bar options:
 1. Penetrating bars
 2. Norwegian style - glued on both sides + slats inside the glazing
 3. Georgian style - glued on both
 4. Decorative bars inside the glazing


Door width max 6000 mm
Door height max 2536 mm
Sash width 486 ... 936 mm
Sash weight max 80 kg




OPENING outside view

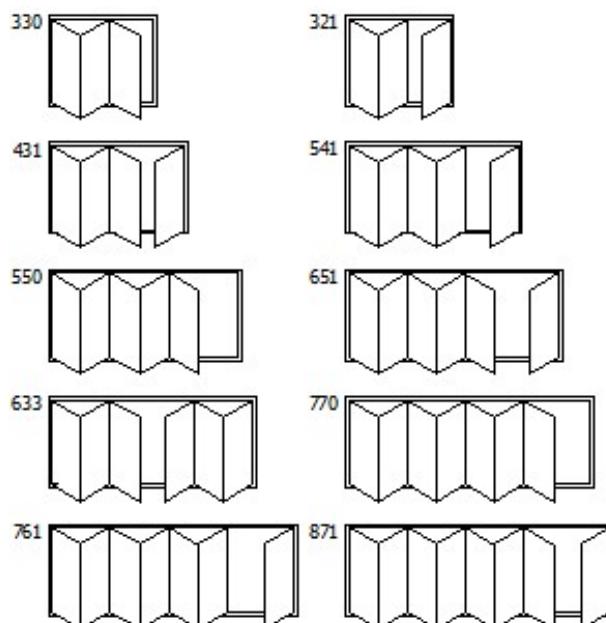

A single active door leaf is also possible as a tilt&turn opening (321; 431 etc.)

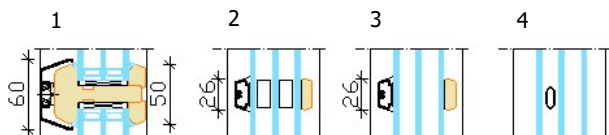


- Extras:
 - Different handles (lockable handles, design handles)
 - Active door leaf with 2-sided handle and DIN lock (models 321;431;541;651;633;761;871)
 - Special glasses (toughened, laminated, pattern, sun protection, self cleaning etc.)
 - Different „warm edges“ for glass unit
 - Aluminium KOMFORT-threshold
 - Jamb extensions
 - External alu cills

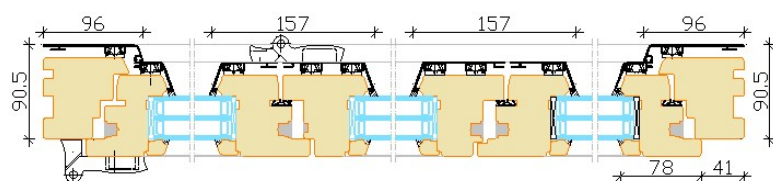


Horizontal section of the 3-piece folding door (scheme 321)




Handles RotoLINE

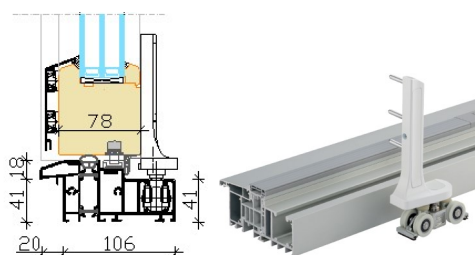

Komfort threshold and lower roller

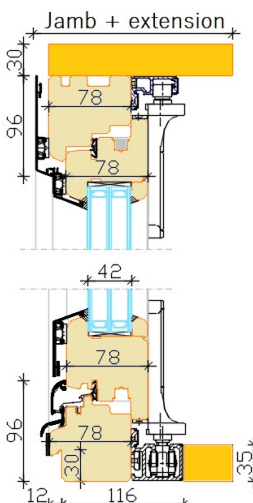

Extension of jamb

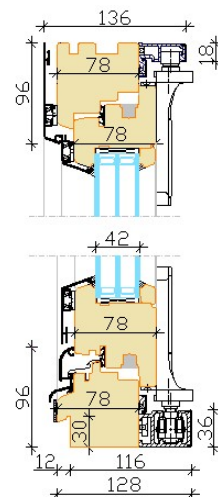

Vertical section
With standard wooden threshold

