

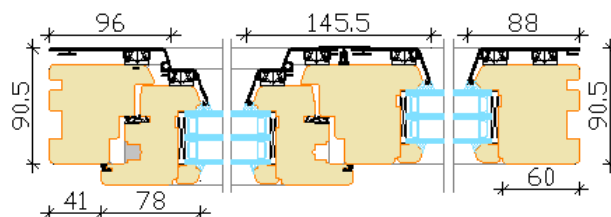


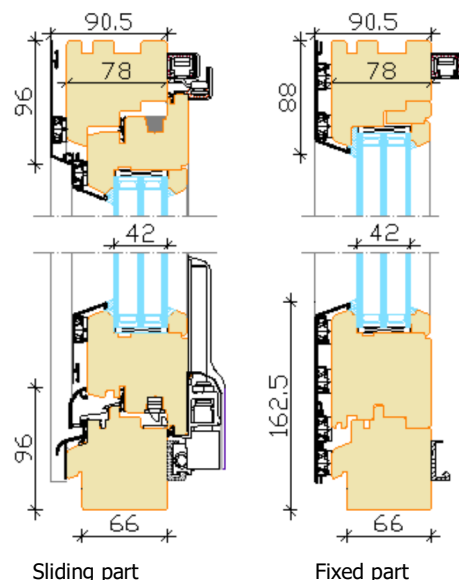

AruAL patio LINE 78 Cora IN

Inward opening tilt&slide alu-clad window/door


- Jamb width 90,5 mm (with aluminium cover)
- Sash thickness 90,5 mm (with aluminium cover)
- Timber selection:
 - fingerjointed, knotted or selected laminated pine timber;
 - laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples
- Aluminium cladding - powder coated. Paint according to RAL color chart
- Triple glazing, thickness 42 mm ($U_g > 0,54 W/m^2K$)
- Product U-value $< 0,99 W/m^2K$
- Glazing with glazing beads inside, sealing from inside and outside with silicone
- Glazing bar options:
 - penetrating glazing bars (1)
 - Vienna glazing bars (Norwegian style) (2)
 - glued-on decorative bars (Georgian style) (3)
 - decorative bars inside the glass unit (4)

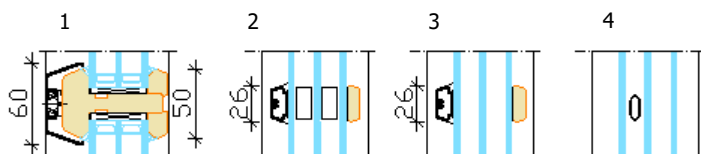


- Extras:
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern, etc.),
 - blinds inside the glass unit,
 - different materials and different colors of edge mouldings,
 - lockable handles, design handles,
 - safety fittings,
 - jamb extensions
- Hardware options:
 - **standard** tilt and slide
max weight of sash 160 kg
Width of sash 650—1680 mm
Height of sash 650—2500 mm
 - **handle-controlled** tilt and slide
max weight of sash 200 kg
Width of sash 760—2030 mm
Height of sash 940—2700 m

Various combinations with opening and non-opening parts


Inside view




1 sliding sash
Left or Right

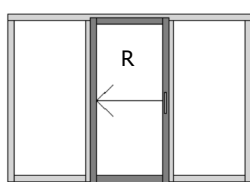

1 sliding sash
Left or Right

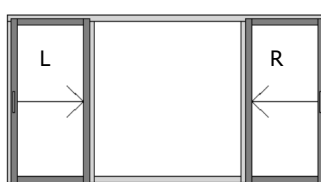

2 sliding sashes
Left and Right

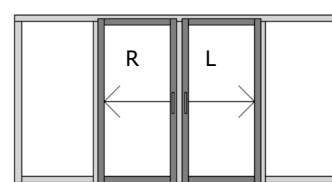

2 sliding sashes
With fixed centre post
Right and Left