



Aru ED 78 Flush-2 EX

outwards opening external door


- Made to Measure Sizes
- Frame 115x54 mm
- Door leaf thickness 78 mm
- Tihendid ümber ukselehe ja lengis
- Frame timber selection:
 - fingerjointed or selected laminated pine timber
 - laminated oak timber
 - laminated meranti timber
- Combi or oak threshold
- Finishing with waterbased paint according to RAL or NCS colour chart
- Triple glazing
- Glazing bar options:
 - glued on both sides of the glass+slats inside the glazing (Norwegian style)
 - glued on both sides of the glass (Georgian style)
 - decorative bars inside the glazing




- Ornament:
 - grooves (only outside or on both sides)
 - glued-on decorative moldings
 - glued-on details
 - glued-on Stainless steel sheet
- 2D adjustable hinges
- Assa modular locks
- Extras:
 - rebated front edge of door leaf
 - grooves for jamb extension
 - jamb extensions
 - special glasses (toughened, laminated, sun protection, pattern)
 - various glass spacers
 - concealed hinges
 - smart locks (e.g. Yale Durus, Halke)
 - erinevad lukusüdamikud, sarjastatud südamikud
 - door handles
 - door closer or stopper
 - letter slot, spy-hole, knocker, timber weather bar, kick plate
- Combinations with fixed parts only in separate frames

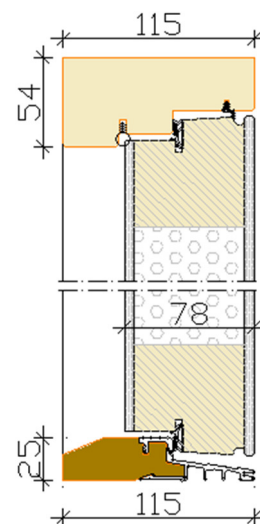

Combi threshold



Oak threshold

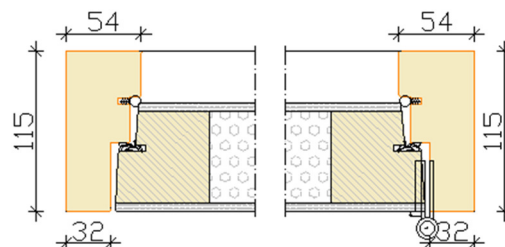

Standard jamb

OPENINGS
Views from outside




LEFT




RIGHT




LEFT
active




RIGHT
active



Ukselehe esiserv
mantliga



Jamb with groove



Jamb with extension