



## Aru ED 78 MODERN-2 EX

### outwards opening 2-seal exterior door

- Made to Measure Sizes
- Jamb 115x54 mm
- Door leaf thickness 78 mm
- Seal in the frame and around the door leaf
- Timber selection:
  - laminated pine timber
  - laminated oak timber
  - laminated meranti timber
- Combi or oak threshold
- Timber finishing with waterbased paint or stain. Paint according to RAL or NCS colour chart, stain according to manufacturer's samples.
- Triple glazing
- Glazing bar options:
  1. penetrating bars
  2. glued on both sides of the glass+slats inside the glazing (Norwegian style)
  3. glued on both sides of the glass (Georgian style)
  4. removable on the outside
  5. dekorative bars inside the glazing
  6. bar frame on the hinges (outside)





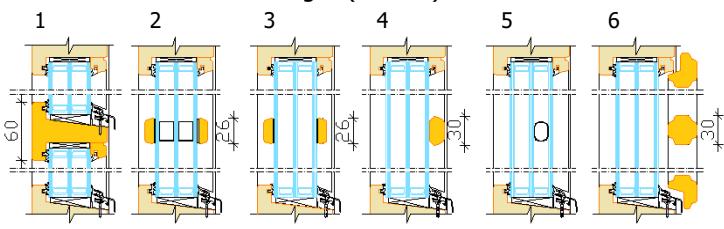


- Crossbars 115 or 96 mm
- Panels:
  - insulated flush panel
  - insulated profile panel (vertical/ diagonal/ herringbone)
  - raised/ moulded panel
  - timber profile blanking inside and outside fixed with screws
  - timber profile blanking outside, insulated panel or timber panel inside




- 2D adjustable hinges
- Scan (Assa, Abloy) or DIN lock cases
- Extras:
  - rebated front edge of the door leaf
  - grooves for jamb extension
  - jamb extensions
  - Special glasses (toughened, laminated, sun protection, self cleaning, pattern etc)
  - various glass spacers
  - concealed hinges
  - smart locks (e.t.c. Yale Durus, Halke)
  - different lock cylinders, serialized cylinders
  - door handles
  - door closer or stopper
  - letter slot, spy-hole, knocker, timber weather bar, kick plate
- Combinations with fixed parts:
  - in the same frame as the door
  - in separate frame


More information from our specialists.  
The manufacturer reserves the right to make changes.

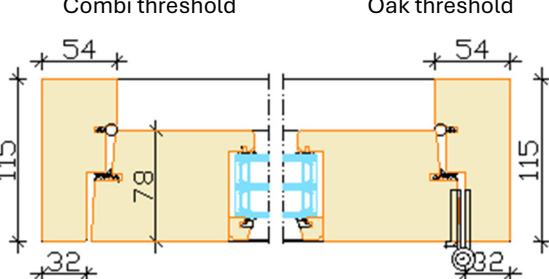


Standard jamb



Rebated front edge



Jamb with groove



Jamb with extension

OPENINGS  
Views from outside




LEFT



RIGHT



LEFT active



RIGHT active

Single door  
minimum-maximum  
Width 600...1100 mm  
Height up to 2400 mm  
Door leaf weight max 75 kg